



ADVANCED SYSTEMS

DESIGNERS & INTEGRATORS OF INDUSTRIAL DOORS & DOOR CONTROL SYSTEMS

1020 W. 14 MILE ROAD • CLAWSON, MI 48017 • PHONE 877 436- 0302 • WWW.ADVANCEDSYSTEMSDOORS.COM

TNR[®] INDUSTRIAL DOORS

model
HDM/HDE

TNR[®] delivers rugged durability.

These TNR[®] rubber roll-up door models are best suited for industrial and commercial applications that are situated in:

- harsh environments of dirt, dust, temperature, rain and snow
- high pressure and windload • door impact concerns



Rugged



Performance



Size

Your fast pace and rugged workplace demands tough doors that give you peace of mind. In the most severe applications TNR[®] rubber roll-up doors deliver unmatched

durability and reliability. Year after year, receive trusted performance with maximum up-time and minimal maintenance. TNR's team gets you the door you need.



Get Tough. Go Rubber.™

visit us online at www.tnrdoors.com



ADVANCED SYSTEMS

DESIGNERS & INTEGRATORS OF INDUSTRIAL DOORS & DOOR CONTROL SYSTEMS

1020 W. 14 MILE ROAD • CLAWSON, MI 48017 • PHONE 877 436- 0302 • WWW.ADVANCEDSYSTEMSDOORS.COM



model HDM/HDE



rugged

performance

size



HDM: MANUAL HDE: ECONOMY

The full value of having a rugged TNR® rubber door is clearly evident when it withstands and endures the dirtiest and roughest workplaces imaginable. Typical industries that have discovered the indestructible qualities of TNR® rubber doors are Manufacturing Process and Maintenance Buildings in: mining, petroleum, military, agriculture, pulp & paper and steel.



Features

TNR® MECHANICAL COMPONENTS		HDM	HDE			HDM	HDE
• 1/4" Black SBR rubber with polyester core weave. Flexible and resistant to abusive environments and impacts in temperatures from -40°F to +180°F.		■	■	• Sleek profile with easy installation, reduced clearances & minimal maintenance. No hinges, cables, pulleys or tension springs.		■	■
• Patented NEWGEN® guide and curtain lok™ system. Reliable and consistent door operation and impact release performance. No guide gap maintenance required. After an impact the door is up and running in minutes.		■	■	• Knock-away double angle steel bottom bar		■	■
• Self-supporting steel mounting angle.		■	■	• Frame mounted thru-beam photoelectric sensor.			■
• Windload and airflow pressure, standard building code pressure ratings of 88mph (20psf).		■	■	• Options: colors, windows, hoists, traveling windbar for high windload applications.		<input type="checkbox"/>	<input type="checkbox"/>
• 10 lb/ft with rubber loop							■
• 10 lb/ft with rubber loop and reversing edge							■
TNR® BUILT TO YOUR NEEDS DRIVE SYSTEMS							
• Door Operations	• Manual Chain Hoist.	■		• Door Speed up to: - measured inches per second			18
	• Heavy Duty Gear Head Operator with push button controls open, close, stop.		■	• Counterbalance spring assembly cycle rating (,000)		50	133
				• Options: access controls and specialty functions.		<input type="checkbox"/>	<input type="checkbox"/>
WARRANTY							
• 2-year warranty on parts and workmanship.		■	■	• Limited lifetime warranty on curtain and NEWGEN® Guide.		■	■



TNR® RUBBER ROLL-UP DOORS GIVE YOU PEACE OF MIND

NEWGEN® Guide and Curtain Lok™ system

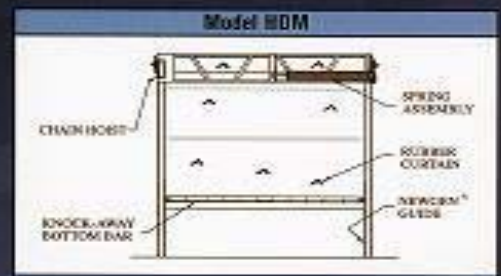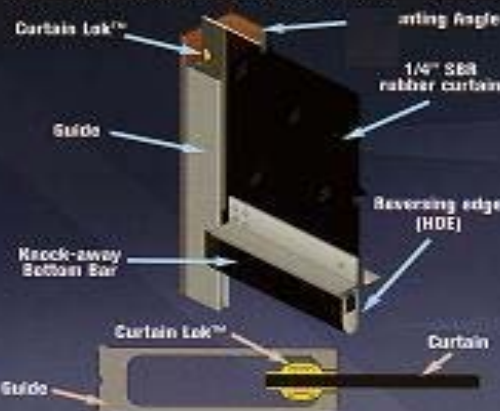

Advanced Systems
 1020 W. 14 Mile Road
 Clawson, MI 48017
 Ph. 877 436-0302
advancedsystemsdoors.com