



ADVANCED DOOR SYSTEMS

DESIGNERS & INTEGRATORS OF INDUSTRIAL DOORS & DOOR CONTROL SYSTEMS

1020 W. 14 MILE ROAD • CLAWSON, MI 48017 • PHONE 877-436-0302 • WWW.ADVANCEDSYSTEMSDOORS.COM

Rubber Curtain Doors

TNR[®] INDUSTRIAL DOORS

model HDL/HDXL

TNR[®] offers rugged durability and high performance drive systems for large door sizes.

- These TNR[®] rubber roll-up door models are best suited for industrial and commercial applications with:
- harsh environments of dirt, dust, temperature, rain and snow
 - high pressure and windload
 - door impact concerns
 - big door opening sizes for large equipment access



Rugged



Performance



Size

Your fast pace and rugged workplace demands tough doors that give you peace of mind. In the most severe applications TNR[®] rubber roll-up doors deliver unmatched

durability and reliability. Year after year, receive trusted performance with maximum up-time and minimal maintenance. TNR's team gets you the door you need.



Get Tough. Go Rubber.™

visit us online at www.tnrdoors.com



ADVANCED DOOR SYSTEMS

DESIGNERS & INTEGRATORS OF INDUSTRIAL DOORS & DOOR CONTROL SYSTEMS

1020 W. 14 MILE ROAD • CLAWSON, MI 48017 • PHONE 877-436-0302 • WWW.ADVANCEDSYSTEMSDOORS.COM

Rubber Curtain Doors

TNR INDUSTRIAL DOORS

model
HDL/HDXL



rugged



performance



size



HDL: LARGE HDXL: EXTRA LARGE

TNR® leads the way with High Performance, Rugged Roll-up Doors for large openings. Big equipment needs big access openings. TNR's rubber doors go beyond 40 feet in width and up to 35 feet in height and are virtually indestructible. TNR® has the Engineering and Field Experience that assures the "Built To Your Needs" attention delivering peace of mind in applications of: **heavy manufacturing, steel, pulp & paper, waste management, oil & gas and mining.**

Features

TNR® MECHANICAL COMPONENTS

	HDL	HDXL		HDL	HDXL
• 1/4" Black SBR rubber with polyester core weave. Flexible and resistant to abusive environments and impacts in temperatures from -40°F to +180°F.	■	■	• Sleek profile with easy installation, reduced clearances & minimal maintenance. No hinges, cables, pulleys or tension springs.	■	■
• Patented NEWGEN® guide and curtain lok™ system. Reliable and consistent door operation and impact release performance. No guide gap maintenance required. After an impact the door is up and running in minutes.	■	■	• Self-supporting Steel Frame.	■	■
• Windload and airflow pressure, standard building code pressure ratings of 88mph (20psf).	■	■	• Steel Mounting Angle.	■	■
• Knock-away double angle steel bottom bar with rubber loop and reversing edge – measured in lb/ft.	10	15	• Channel Steel C10 & flatbar mounting assembly.	■	■
			• Frame mounted thru-beam photoelectric sensor.	■	■
			• Options: colors, windows, hoods, traveling windbar for high windload applications.	□	□

TNR® BUILT TO YOUR NEEDS DRIVE SYSTEMS

	HDL	HDXL		HDL	HDXL
• High Efficiency Helical Gear Head (HG) Operator with multi-function capacity PLC Control Panel.	■	■	• Counterbalance spring assembly cycle rating (,000).	50	50
• Door Speed up to: – measured inches per second	20	12	• Options: access controls and specialty functions.	□	□



WARRANTY

	HDL	HDXL		HDL	HDXL
• 2-year warranty on parts and workmanship.	■	■	• Limited lifetime warranty on curtain and NEWGEN® Guide.	■	■



TNR® RUBBER ROLL-UP DOORS YOU CAN RELY ON WHEN THE MACHINES ARE BIG.

NEWGEN® Guide and Curtain Lok™ system

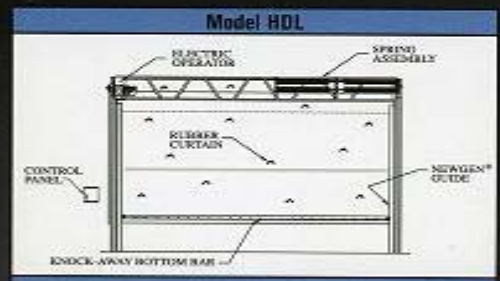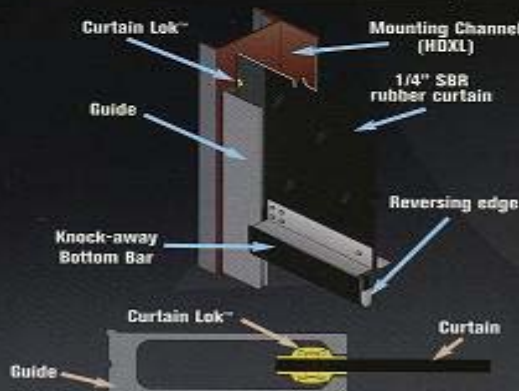

Advanced Dor Systems
PH. 877 436 0302
Fax 866 285 5139
advancedsystemsdoors.com